



US006922242B2

(12) **United States Patent**
Sachse

(10) **Patent No.:** US 6,922,242 B2
(45) **Date of Patent:** *Jul. 26, 2005

(54) **OPTICAL PATH SWITCHING BASED
DIFFERENTIAL ABSORPTION
RADIOMETRY FOR SUBSTANCE
DETECTION**

(75) **Inventor:** Glen W. Sachse, Tabb, VA (US)

(73) **Assignee:** The United States of America as
represented by the Administrator of
the National Aeronautics and Space
Administration, Washington, DC (US)

(*) **Notice:** Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 69 days.

This patent is subject to a terminal dis-
claimer.

(21) **Appl. No.:** 10/465,386

(22) **Filed:** Jun. 19, 2003

(65) **Prior Publication Data**

US 2004/0156050 A1 Aug. 12, 2004

Related U.S. Application Data

(62) Division of application No. 09/437,616, filed on Nov. 10,
1999, now Pat. No. 6,611,329, which is a division of
application No. 09/290,954, filed on Apr. 13, 1999, now Pat.
No. 6,057,923.

(60) Provisional application No. 60/082,355, filed on Apr. 20,
1998.

(51) **Int. Cl.⁷** G01J 4/00

(52) **U.S. Cl.** 356/364

(58) **Field of Search** 356/364-370,
356/300-317, 414-420, 36, 72, 73; 250/373,
338.5, 339.11, 339.13, 227.11, 231.19

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,818,705 A *	4/1989	Schneider et al.	436/164
5,128,797 A *	7/1992	Sachse et al.	359/246
5,343,043 A *	8/1994	Johnson	250/338.5
6,057,923 A *	5/2000	Sachse	356/364
6,611,329 B2 *	8/2003	Sachse	356/364

* cited by examiner


Primary Examiner—Tu T. Nguyen



(74) *Attorney, Agent, or Firm*—Kurt G. Hammerle


(57) **ABSTRACT**

An optical path switch divides sample path radiation into a time series of alternating first polarized components and second polarized components. The first polarized components are transmitted along a first optical path and the second polarized components along a second optical path. A first gasless optical filter train filters the first polarized components to isolate at least a first wavelength band thereby generating first filtered radiation. A second gasless optical filter train filters the second polarized components to isolate at least a second wavelength band thereby generating second filtered radiation. A beam combiner combines the first and second filtered radiation to form a combined beam of radiation. A detector is disposed to monitor magnitude of at least a portion of the combined beam alternately at the first wavelength band and the second wavelength band as an indication of the concentration of the substance in the sample path.

22 Claims, 9 Drawing Sheets

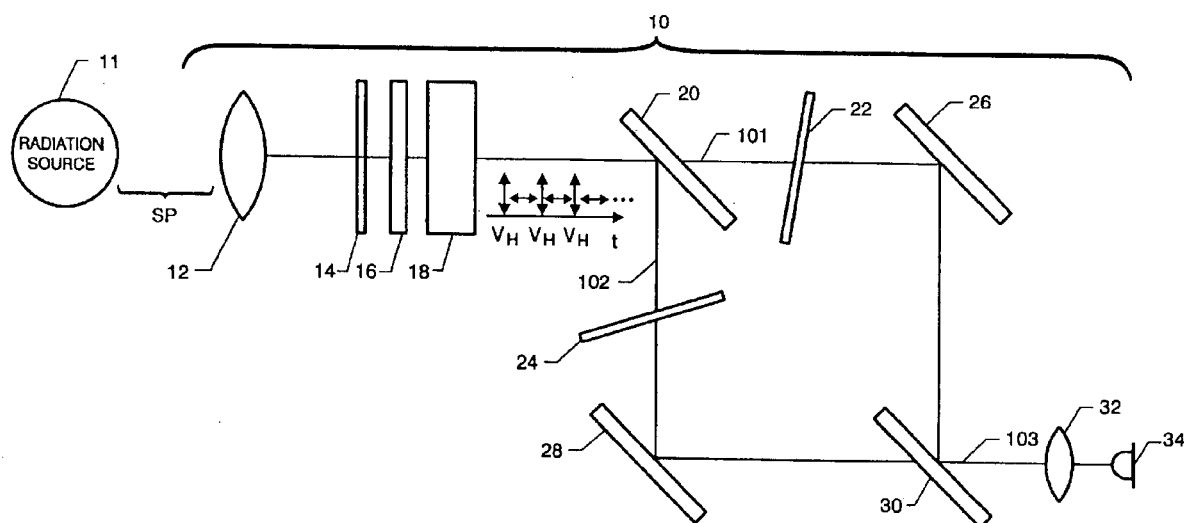

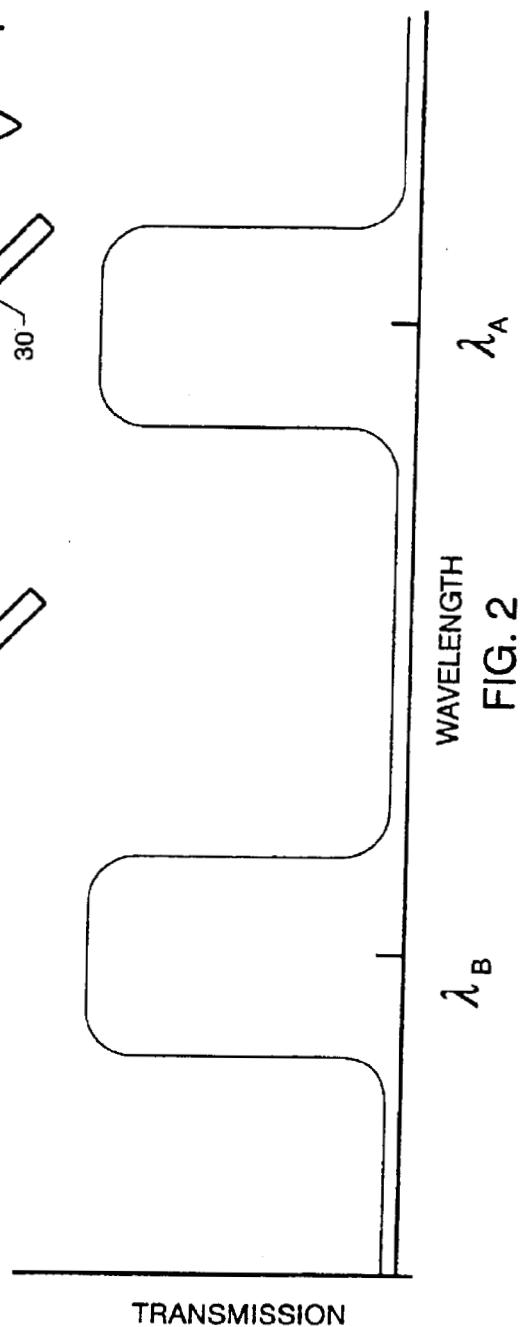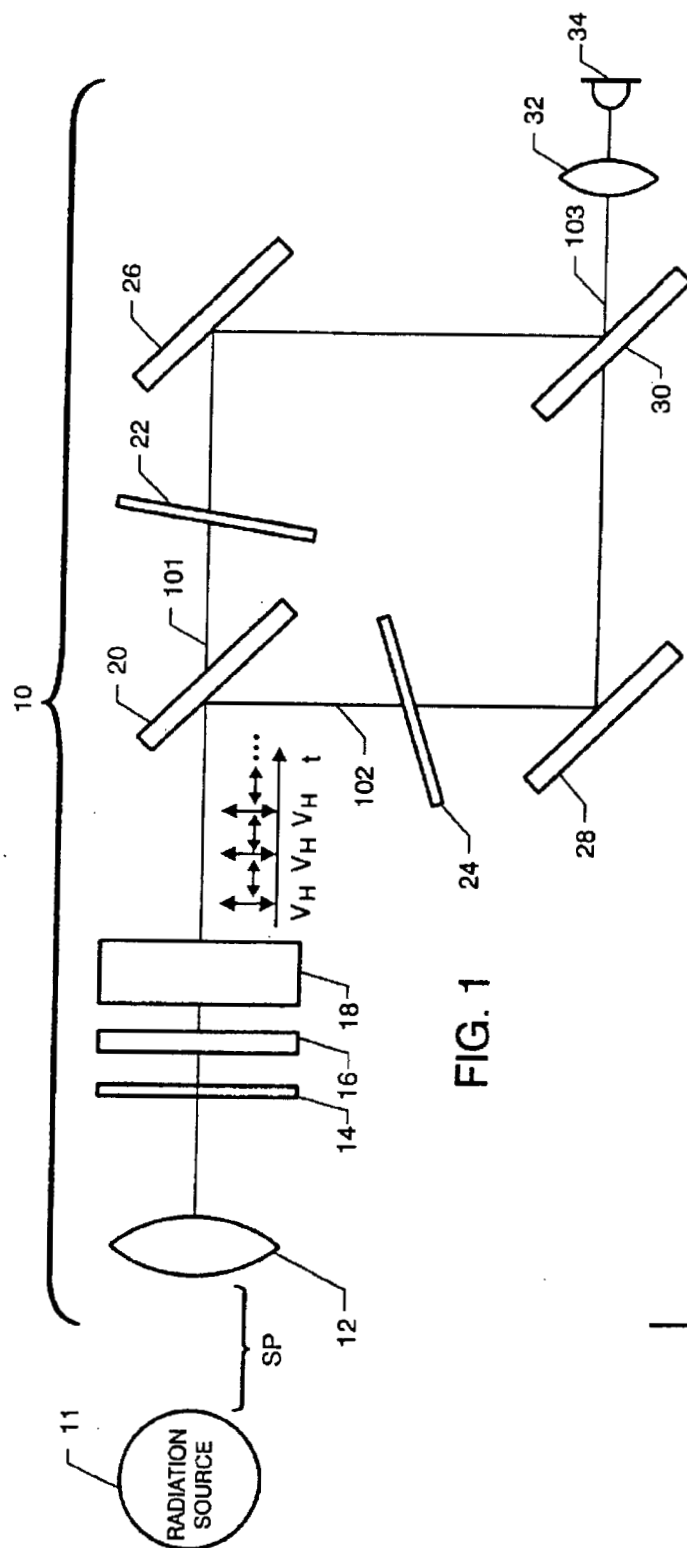

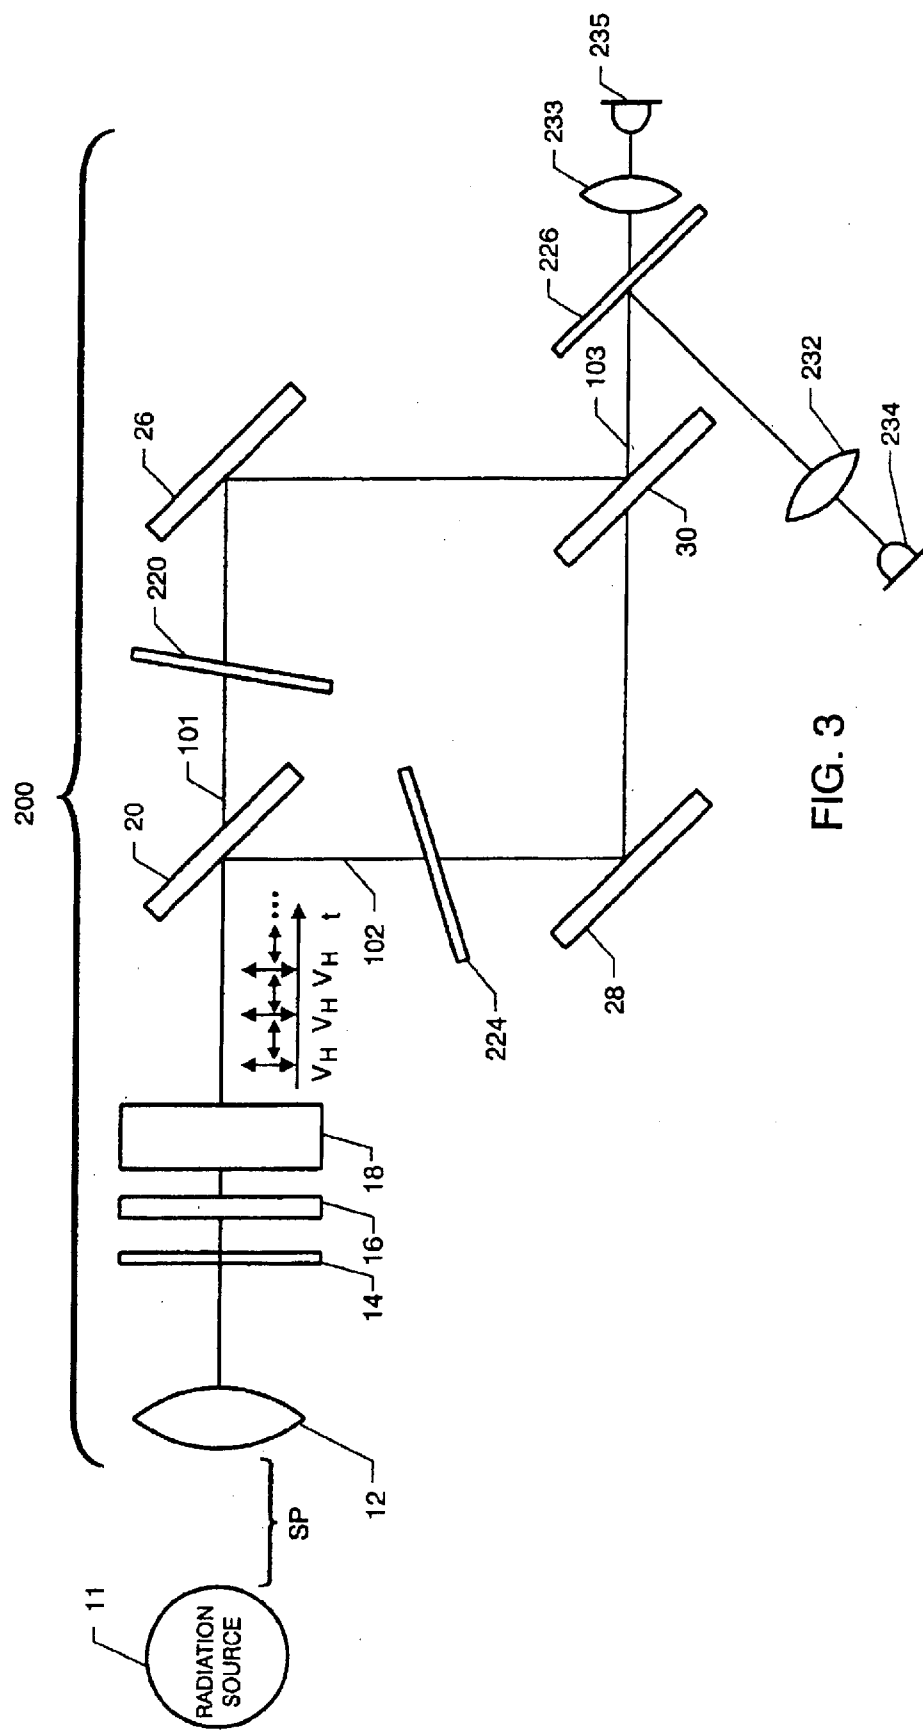

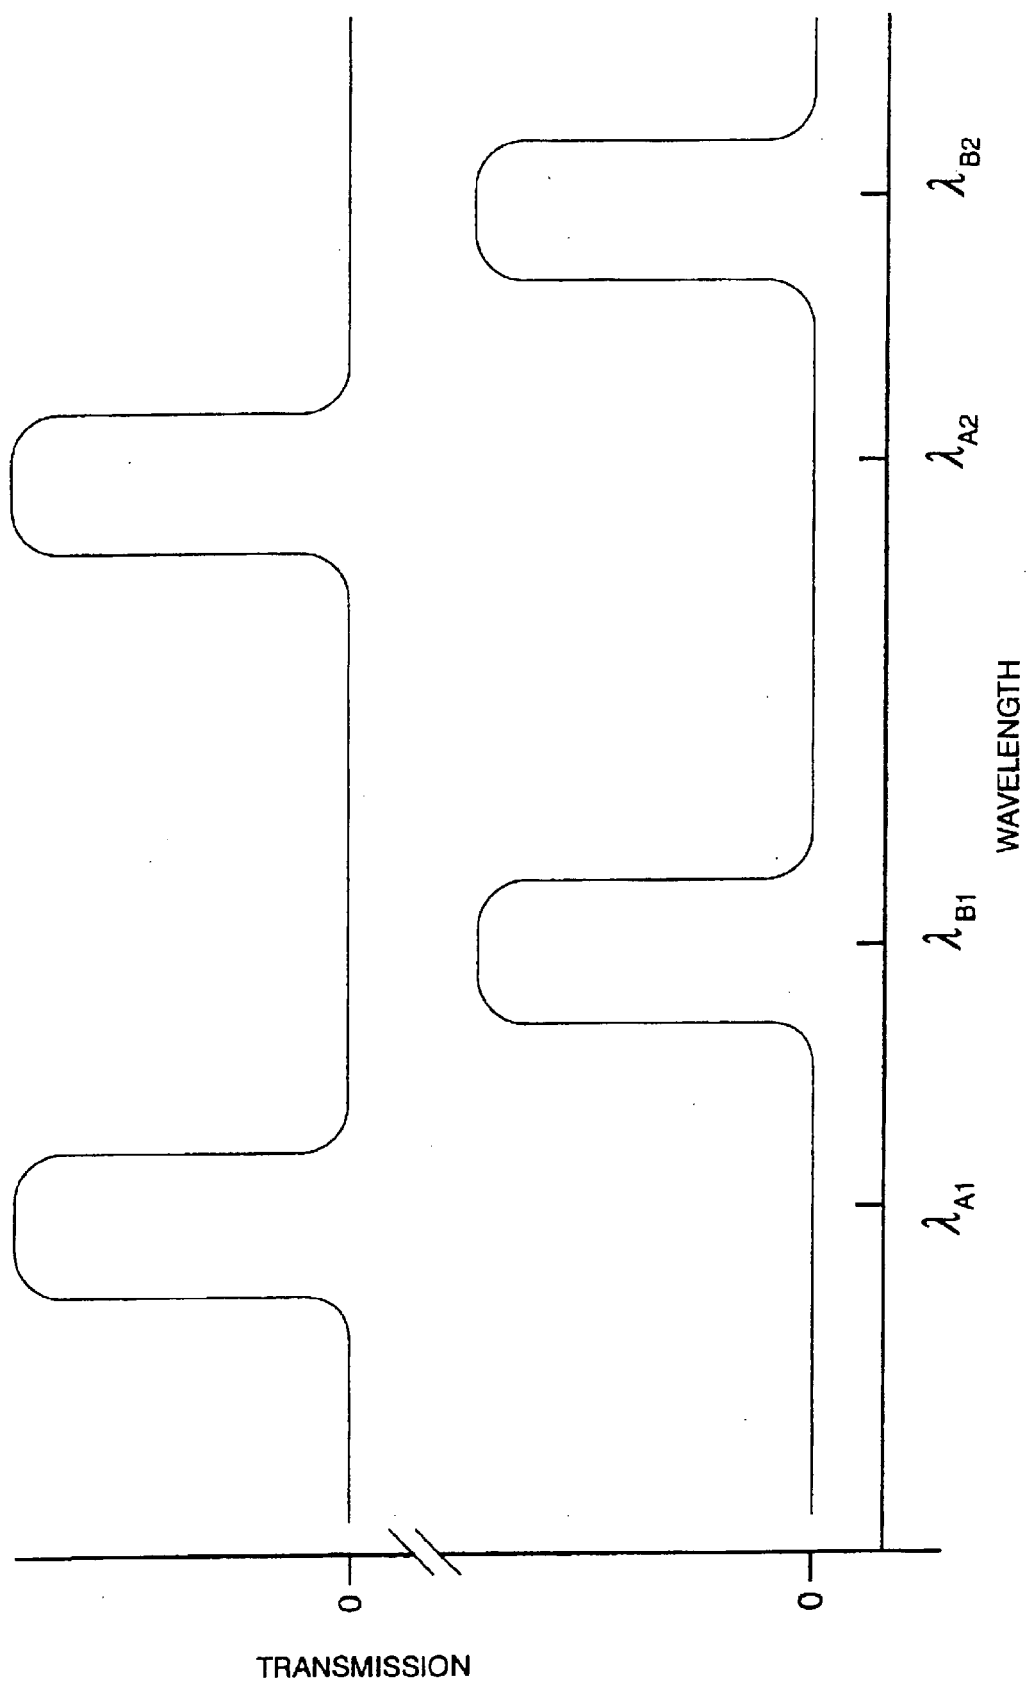


FIG. 4

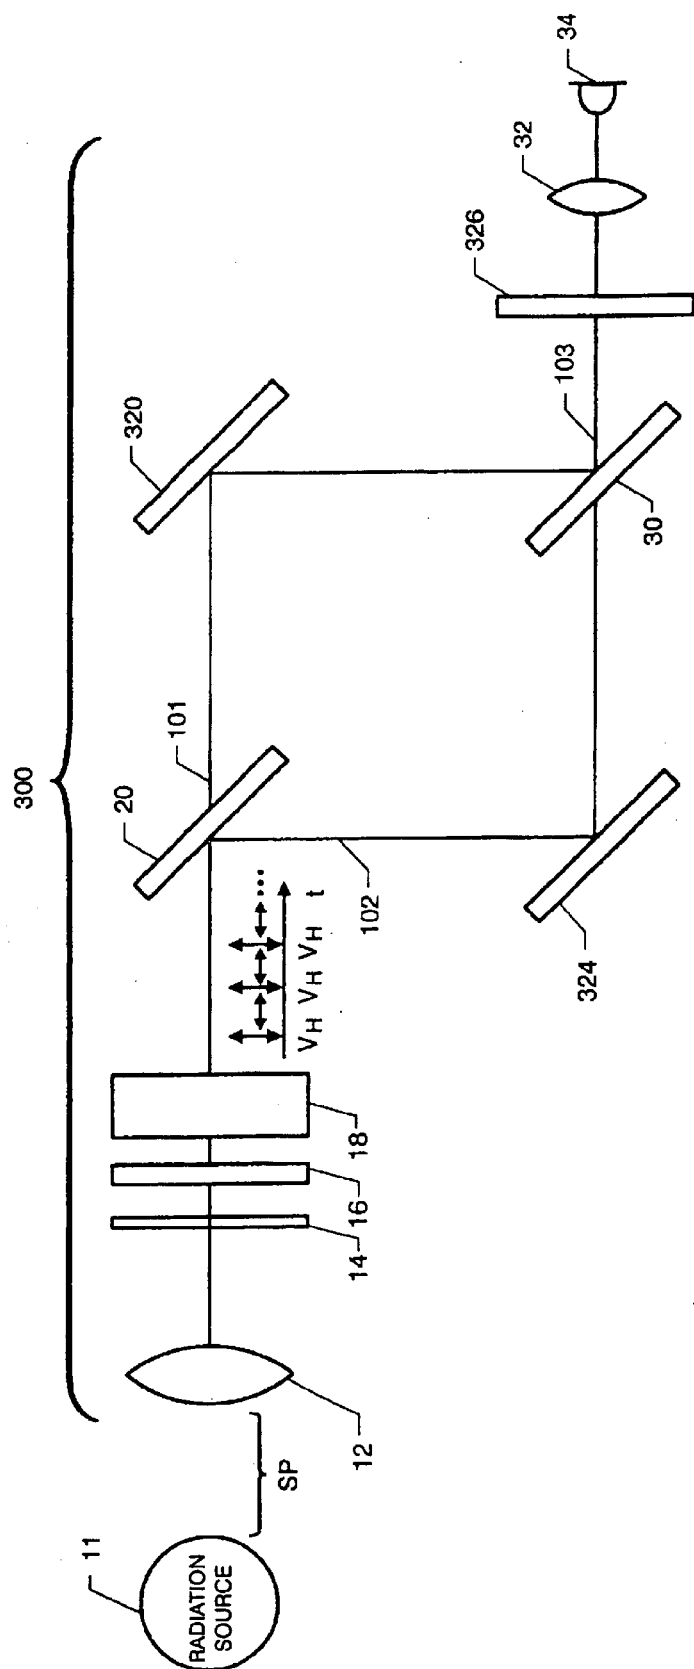
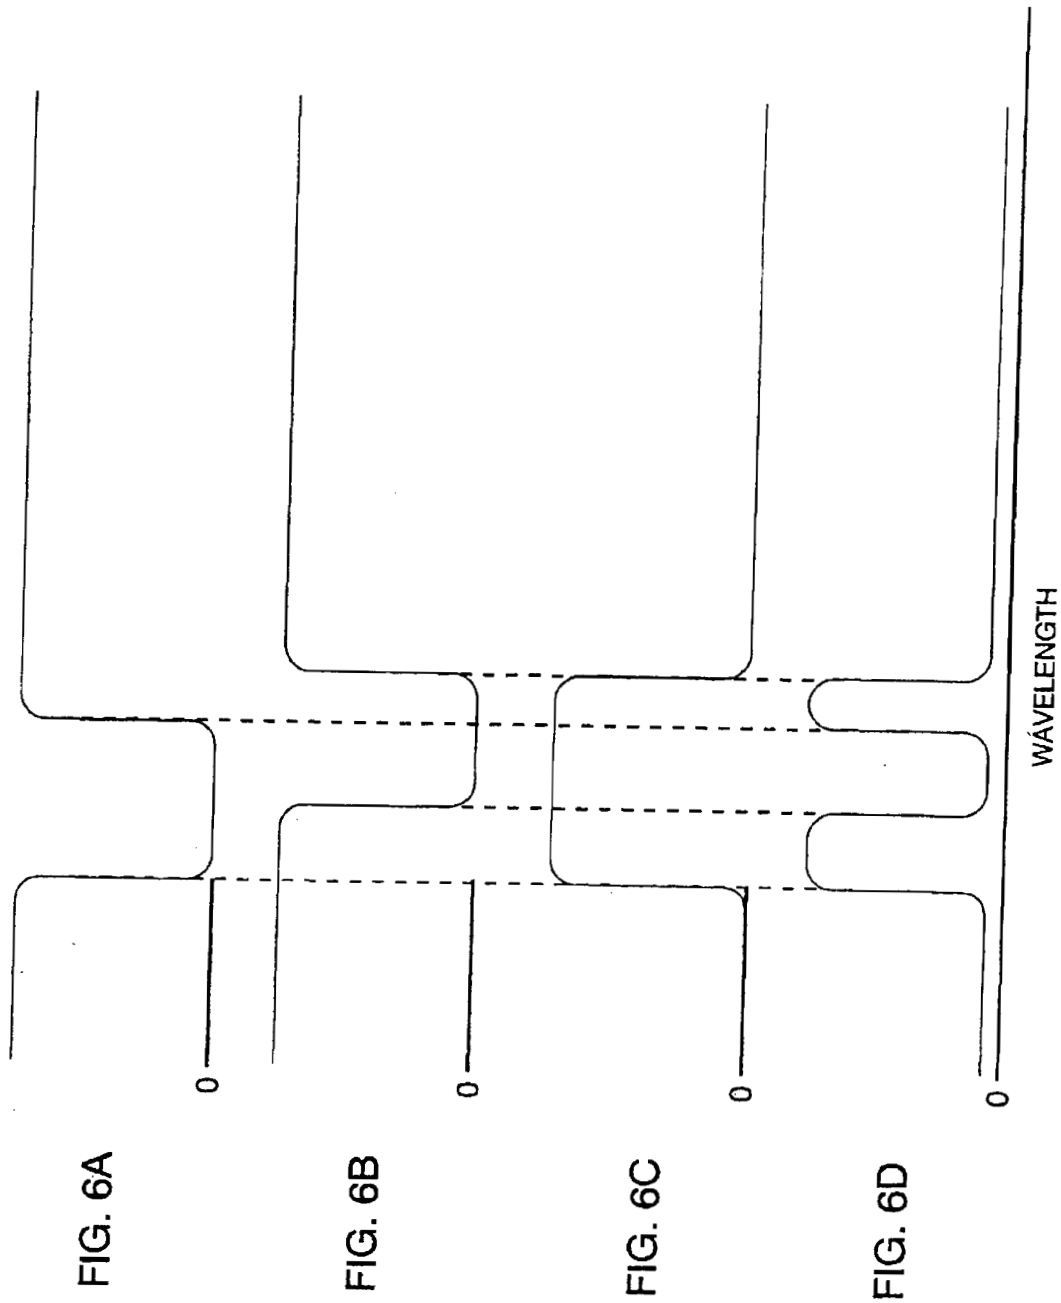


FIG. 5



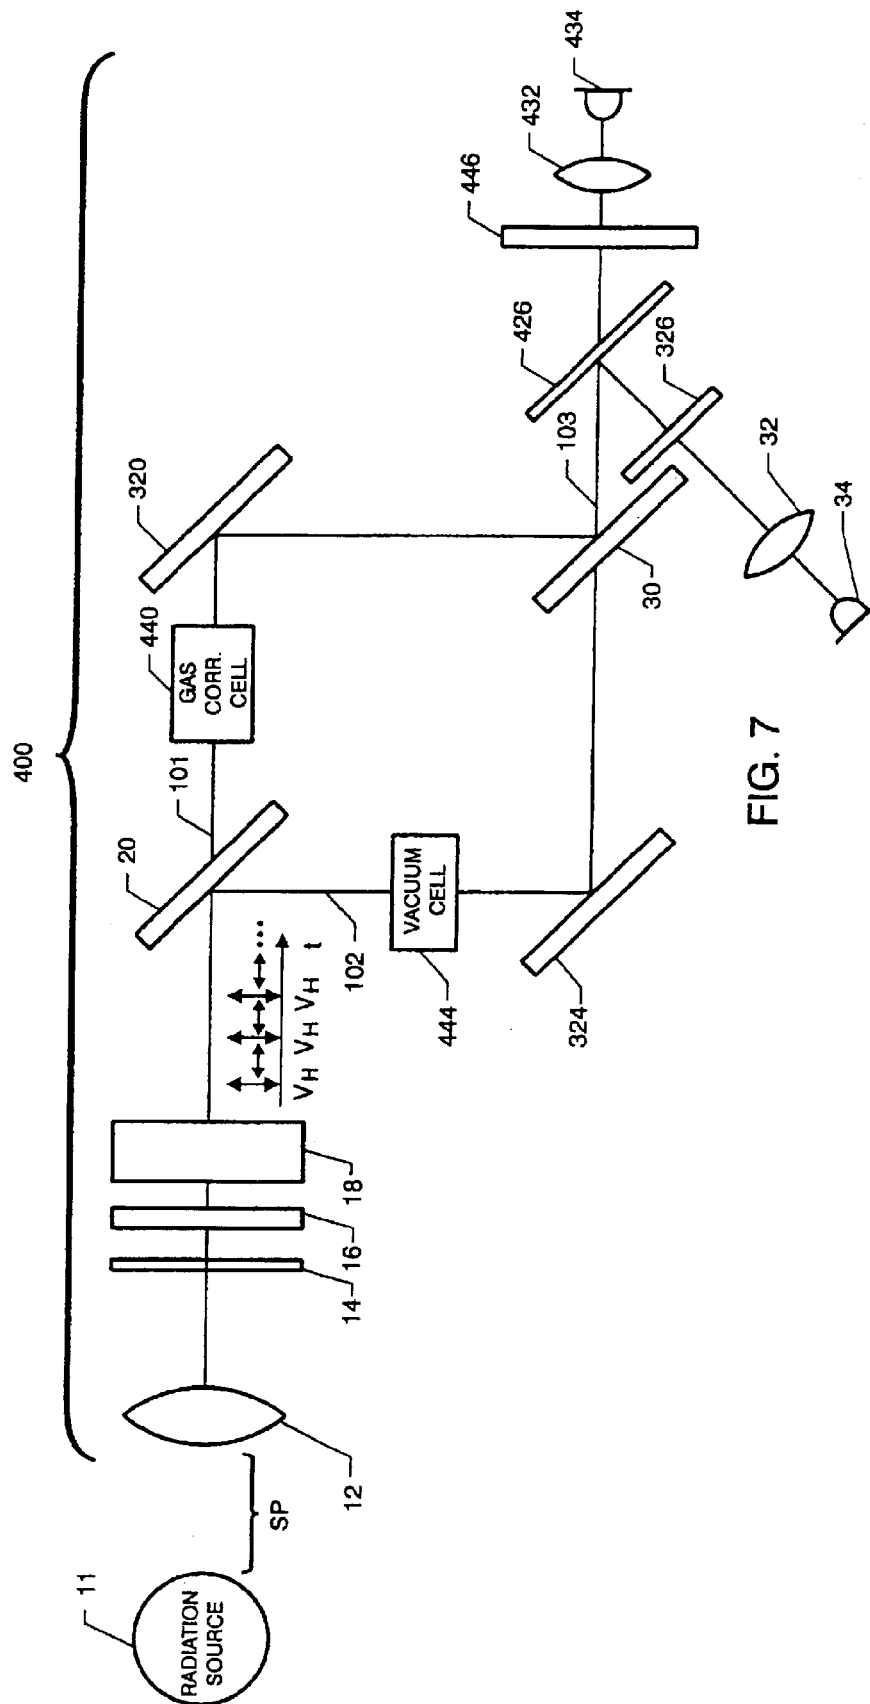
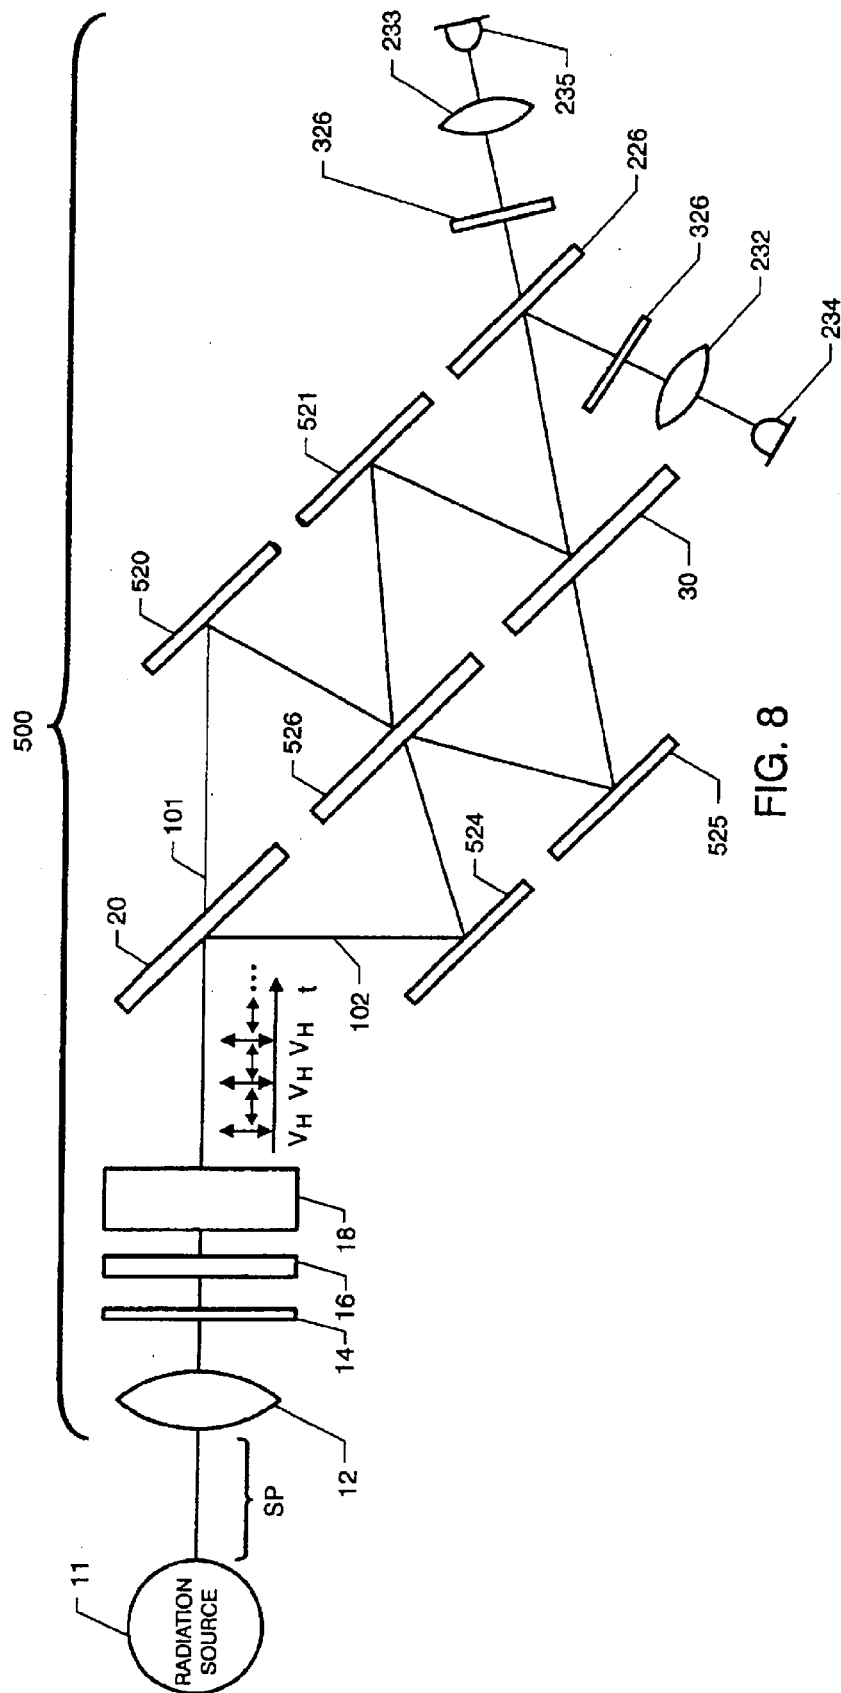


FIG. 7



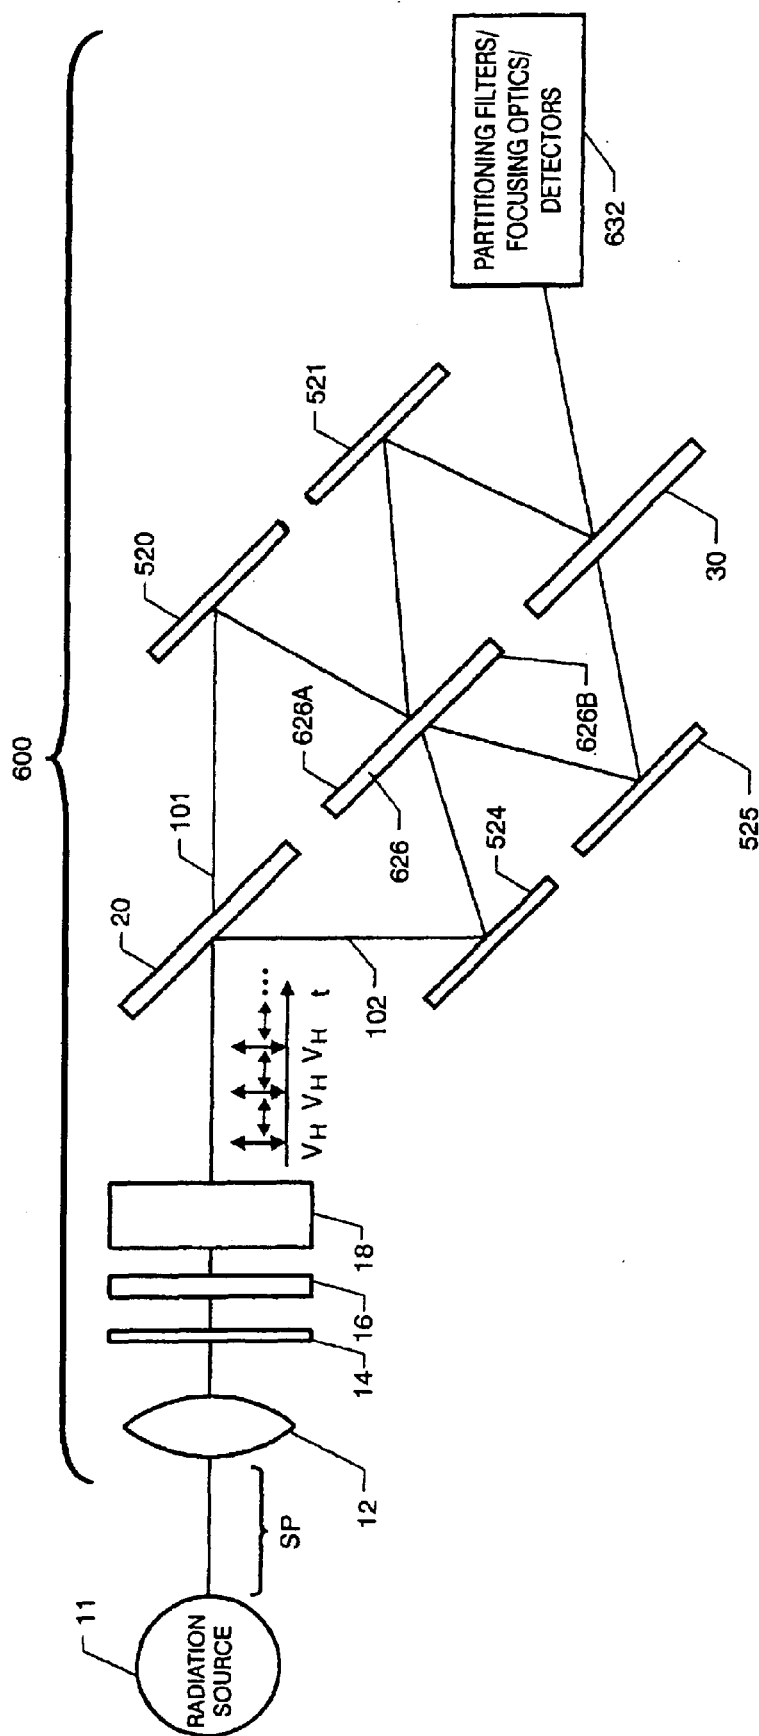


FIG. 9

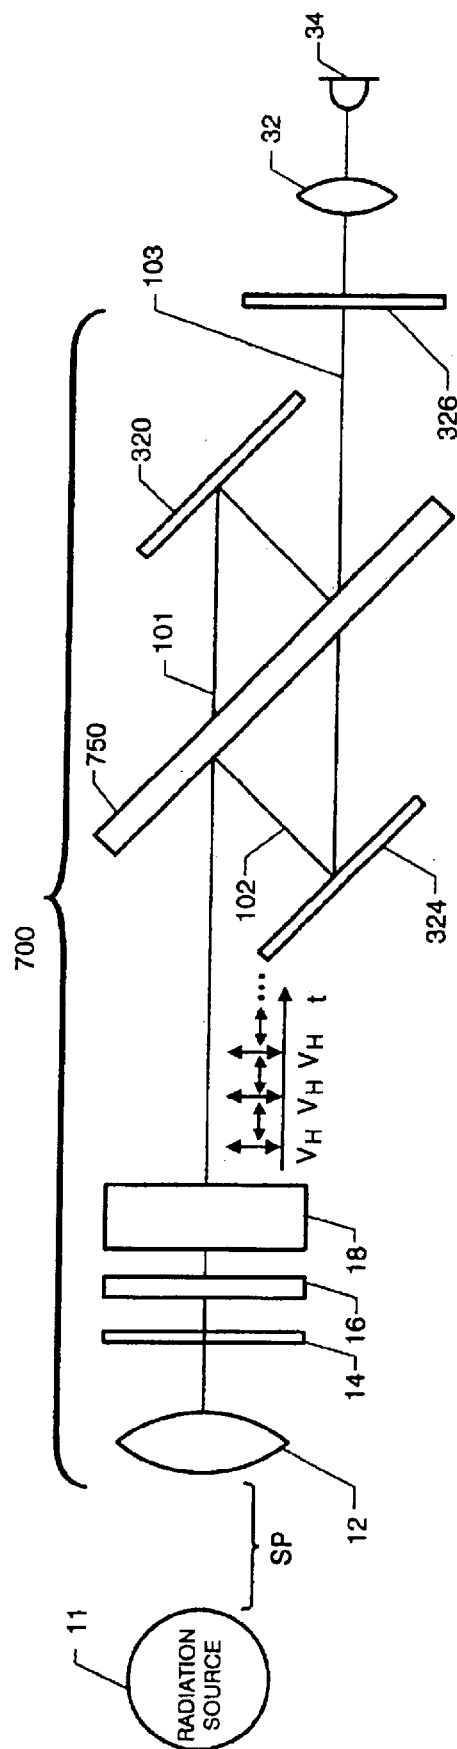


FIG. 10

1

OPTICAL PATH SWITCHING BASED DIFFERENTIAL ABSORPTION RADIOMETRY FOR SUBSTANCE DETECTION

CROSS-REFERENCE TO RELATED APPLICATION

This application is a divisional patent application of commonly owned, patent application Ser. No. 09/437,616, filed Nov. 10, 1999 now U.S. Pat. No. 6,611,329, which is a divisional of patent application Ser. No. 09/290,954, filed Apr. 13, 1999, now issued as U.S. Pat. No. 6,057,923 on May 2, 2000. This application is also related to patent application Ser. No. 09/019,473, filed Feb. 5, 1998, now issued as U.S. Pat. No. 6,008,928 on Dec. 18, 1999.

CLAIM OF BENEFIT OF PROVISIONAL APPLICATION

Pursuant to 35 U.S.C. § 119, the benefit of priority from provisional application No. 60/082,355, with a filing date of Apr. 20, 1998, is claimed for this non-provisional application.

ORIGIN OF THE INVENTION

The invention described herein was made by an employee of the United States Government and may be manufactured and used by or for the Government for governmental purposes without the payment of any royalties thereon or therefor.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to substance detection using optical systems. More specifically, the invention is a system for detecting the presence and/or concentration of a substance in a sample path using polarization-modulated optical path switching and the principles of differential absorption radiometry.

2. Description of the Related Art

Gas filter correlation radiometers (GFCRs) infer the concentration of a gas species along some sample path either external or internal to the GFCR. In many GFCRs, gas sensing is accomplished by viewing alternately through two optical cells the emission/absorption of the gas molecules along the sample path. These two optical cells are called the correlation and vacuum cells. The correlation cell contains a high optical depth of gas species *i* that strongly absorbs radiation at specific molecular transition wavelengths of the particular gas while passing all other wavelengths. In effect, the correlation cell defines a plurality of spectral notches (i.e., strong attenuation) coincident with the band structure of gas species *i*. The vacuum cell generally encloses a vacuum or a gas or gas mixture exhibiting negligible or no optical depth, e.g., nitrogen, an inert gas, or even clean dry air. An optical filter (e.g., interference filter) placed in front of the instrument or in front of the detector limits the spectral information to a region coinciding with an absorption band of the gas of interest. The difference in signal strength between these two views of the emitting/absorbing gas species *i* can be related to the concentration of this gas along the sample path.

A known GFCR for measuring concentration of a single gas is disclosed in U.S. Pat. No. 5,128,797, issued to Sachse et al. and assigned to the National Aeronautics and Space Administration (NASA), the specification of which is hereby incorporated by reference. The GFCR includes a

2

non-mechanical optical path switch that comprises a polarizer, polarization modulator, and a polarization beam-splitter. The polarizer polarizes light (that has crossed a sample path after originating from a light source) into a single (e.g., vertically polarized) component which is then rapidly modulated into alternate vertically and horizontally polarized components by a polarization modulator. The polarization modulator may be used in conjunction with an optical waveplate. The polarization modulated beam is then incident on a polarization beamsplitter which, transmits light of one component (e.g., horizontally polarized) and reflects light of a perpendicular component (e.g., vertically polarized). The transmitted horizontally polarized beam is reflected by a mirror, passes through a gas correlation cell and on to a beam combiner. The reflected vertically polarized beam passes through a vacuum cell, is reflected by a mirror, and is passed on to the beam combiner. The beam combiner recombines the horizontal and vertical components into a single beam which passes through an optical interference filter that limits the spectral content of the incoming radiation to an absorption band of the gas species of interest. The single beam is then incident on a conventional detector. However, this system is limited in that it can only measure a single gas concentration.

A GFCR for measuring multiple gases based on the same optical path switching technique is disclosed in U.S. patent application Ser. No. 09/019,473, filed Feb. 5, 1998, now U.S. Pat. No. 6,008,928, issued Dec. 28, 1999, by Sachse et al. and assigned to the National Aeronautics and Space Administration (NASA). In this system, each optical path contains one or more cells with each cell having spectral features of one or more gases of interest. The two optical paths are then intersected to form a combined polarization modulated beam which contains the two orthogonal components in alternate order. The combined polarization modulated beam is partitioned into one or more smaller spectral regions of interest where one or more gases of interest has an absorption band. The difference in intensity between the two orthogonal polarization components in each partitioned spectral region of interest is then determined as an indication of the spectral emission/absorption of the light beam along the sample path. The spectral emission/absorption is indicative of the concentration of the one or more gases of interest in the sample path.

Both of the afore-described systems require the use of gas correlation cells. However, there are instances where gas correlation cells are not practical. For example, some gases are too dangerous and/or require a gas correlation cell construction that is too expensive for a particular application. Further, some gases such as ozone are too reactive to contain in a gas cell. Still further, it may also be desirable to detect/measure a broad category of gases, e.g., hydrocarbons. However, to accomplish this measurement with a GFCR system, many gases would have to be contained within one cell or the beam would have to be passed through multiple gas cells.

SUMMARY OF THE INVENTION

In accordance with the present invention, a system and method are provided for detecting one or more substances. An optical path switch receives radiation passing along a measurement or sample path of interest. The switch divides the radiation into a time series of alternating first polarized components and second polarized components that are orthogonal to the first polarized components. The first polarized components are transmitted along a first optical path and the second polarized components along a second optical

3

path. A first gasless optical filter train disposed in the first optical path filters the first polarized components to isolate at least a first wavelength band thereby generating first filtered radiation. A second optical filter train disposed in the second optical path filters the second polarized components to isolate at least a second wavelength band thereby generating second filtered radiation. The first wavelength band and second wavelength band are unique. Further, spectral absorption of a substance of interest is different at the first wavelength band as compared to the second wavelength band. A beam combiner disposed to receive the first and second filtered radiation combines same to form a combined beam of radiation. A detector is disposed to monitor magnitude of at least a portion of the combined beam alternately at the first wavelength band and the second wavelength band as an indication of the concentration of the substance in the sample path.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic representation of one embodiment of a substance detection system according to the present invention;

FIG. 2 is a graphical illustration of the filter characteristics of the bandpass filters used in the FIG. 1 embodiment;

FIG. 3 is a schematic representation of another embodiment of the present invention in which two substances can be detected/measured simultaneously;

FIG. 4 is a graphical illustration of the filter characteristics of the bandpass filters used in the FIG. 3 embodiment;

FIG. 5 is a schematic representation of another embodiment of the present invention in which bandpass filters are used in reflection;

FIG. 6A is a graphical illustration of one reflecting filter's characteristics used in the FIG. 5 embodiment;

FIG. 6B is a graphical illustration of the other reflecting filter's characteristics used in the FIG. 5 embodiment;

FIG. 6C is a graphical illustration of a bracketing bandpass filter's characteristics used in the FIG. 5 embodiment;

FIG. 6D is a graphical illustration of the spectral information reaching the detector in the FIG. 5 embodiment;

FIG. 7 is a schematic representation of another embodiment of the present invention in which differential absorption measurements and gas filter correlation radiometry (GFCR) measurements are made simultaneously;

FIG. 8 is a schematic representation of another embodiment in which two substances can be detected/measured simultaneously using bandpass filters in reflection;

FIG. 9 is a schematic representation of another embodiment in which three substances can be detected/measured simultaneously; and

FIG. 10 is a schematic representation of another embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings, and more particularly to FIG. 1, one embodiment of a substance detection system according to the present invention is shown and referenced generally by numeral 10. By way of example, the present invention will be described as it relates to the detection, measurement, and/or characterization of substances in the gaseous state. However, the present invention can be used to detect, measure, and/or characterize any substance, i.e., gas, liquid, or solid, that exhibits spectrally varying absorption characteristics.

4

System 10 includes an optics system 12, e.g., a telescope or other lens/mirror system, that collects light from a radiation source 11, such as the earth, the atmosphere, or the sun when system 10 is mounted on a satellite or aircraft, or a hot filament, light emitting diode, laser, etc., when system 10 is used as a laboratory or in-situ instrument. Radiation from source 11 generally comprises both vertically polarized components V and horizontally polarized components H. The radiation passes between source 11 and system 10 along a sample path SP. The presence of a substance or substances of interest along path SP may affect the radiation in a way that can be detected, measured, and/or characterized by system 10. An optical path switch provided after optics system 12 includes an optical polarizer 14, an optical waveplate 16, a polarization modulator 18, and a polarization beamsplitter 20. Such an optical path switch is disclosed in detail in the afore-mentioned U.S. Pat. No. 5,128,797 to Sachse et al., and will therefore only be described briefly herein.

Optical polarizer 14 is provided after the optics system 12 and is aligned to polarize the incoming radiation in the desired fashion, e.g., vertically in the embodiment depicted in FIG. 1. Polarization modulator 18 (e.g., a photo-elastic modulator) then receives the incident vertically polarized beam and rapidly modulates the output beam between vertical and horizontal polarization. Depending on the measurement application and the type of polarization modulator utilized, the polarization modulation frequency may range from near direct current (DC) to radio frequencies (RF). The polarization modulator may be used in conjunction with optical waveplate 16. The output of modulator 18 is a time series of alternating vertically polarized components V and horizontally polarized components H as illustrated in FIG. 1. The switching frequency between V and H is determined by the modulation frequency of modulator 18.

Polarization beamsplitter 20 non-mechanically switches the polarization modulated output beam between two paths by, for example, transmitting the beam along path 101 when it is vertically polarized and reflecting it along path 102 when it is horizontally polarized. Alternatively, beamsplitter 20 may be oriented so as to reflect vertically polarized light and to transmit horizontally polarized light. Thus, beamsplitter 20 rapidly diverts or routes the radiation beam alternately between optical paths 101 and 102 depending on the rapidly time-varying state of polarization which is controlled by modulator 18. Note that although paths 101 and 102 are illustrated as being perpendicular to one another, this need not be the case as will be apparent in other embodiments of the present invention described later below.

The radiation beam transmitted along optical path 101 is incident on a gasless optical bandpass filter 22 configured to transmit only a wavelength band of radiation centered at λ_A while reflecting other wavelengths. The radiation beam transmitted along optical path 102 is incident on a second gasless optical bandpass filter 24 configured to transmit only a wavelength band of radiation centered at λ_B while reflecting other wavelengths. Filters 22 and 24 are selected/constructed such that the bands centered at λ_A and λ_B are unique as illustrated in FIG. 2. Further, the spectral absorption of the substance to be detected, measured, and/or characterized must be different at the two bands. The greater the difference in spectral absorption characteristics between the two bands, the greater the measurement sensitivity of system 10. Accordingly, in an example of the ideal case, spectral absorption occurs only in the band centered at λ_A (i.e., spectral absorption in the band centered at λ_B would be zero). However, it is to be understood that the present

invention will work as long as there is some difference in spectral absorption (of the substance of interest) between the two bands.

The resulting filtered radiation beams passed along optical paths **101** and **102** are directed/reflected by mirrors **26** and **28**, respectively, to a polarization beam combiner **30** (e.g., a polarization beamsplitter). Beam combiner **30** outputs a single beam along path **103** in which the beam's polarization state varies in time at the fundamental frequency (and harmonics thereof) of modulator **18**. In other words, the output of beam combiner **30** is essentially a time series that alternates between the vertically polarized components V passed by filter **22** and the horizontally polarized components passed by filter **24**. The combined radiation beam passes along optical path **103** and is focused by focusing optics **32** onto a detector **34** which is sensitive to the magnitude of the radiation. Because this radiation is in the form of an alternating time series, detector **34** is essentially viewing an amplitude modulated signal. This phenomenon occurs because a gas (or other substance) present along sample path SP absorbs radiation from radiation source **11** differentially at the bands centered at λ_A and λ_B . Thus, the differential absorption experienced by the radiation traversing sample path SP is viewed by detector **34** as an amplitude modulated signal. The magnitude of the amplitude modulated signal at the polarization modulation frequency (or its harmonics) is related to the amount or concentration of the substance of interest in sample path SP. Note that if system **10** is subject to changes in the incident radiation due to variations in strength of radiation source **11**, turbulence noise, scattering along the optical paths, etc., it may be desirable to normalize the amplitude modulated signal sensed by detector **34**. If this is the case, the amplitude modulated signal can be divided by the DC component sensed by detector **34** as is well known in the art.

By way of illustrative example, the present invention will be described briefly for its use in the measurement of hydrocarbons. In this case, filter **22** is chosen so that the band centered at λ_A coincides with the carbon-hydrogen bond absorption typical of hydrocarbons (i.e., λ_A is approximately 3.4 microns). Filter **24** is chosen so that the band centered at λ_B coincides with a wavelength band that is relatively free from hydrocarbon absorption (i.e., λ_B is approximately 3.0 microns). By monitoring the magnitude of the amplitude modulated signal sensed by detector **34**, the absorption by hydrocarbons present in sample path SP can be detected and measured in a simple fashion, i.e., multiple GFCR devices with multiple gas filter correlation cells (e.g., one for each hydrocarbon of interest) are not required.

Although described relative to the embodiment in FIG. 1, the present invention is not so limited. For example, another embodiment of a substance detection system in accordance with the teachings of the present invention is shown and referenced generally by numeral **200** in FIG. 3. Like reference numerals will be used for those elements that are the same as those used in the FIG. 1 embodiment. The embodiment in FIG. 3 is similar to that in FIG. 1 except that filters **22** and **24** are replaced with dual bandpass filters **220** and **224**, respectively. Specifically, filter **220** passes unique wavelength bands centered at λ_{A1} and λ_{A2} to mirror **26** with other wavelengths being reflected. Filter **224** passes unique wavelength bands centered at λ_{B1} and λ_{B2} to mirror **28** with other wavelengths being reflected. The bandpass characteristics of filters **220** and **224** are illustrated in FIG. 4. As in the previous embodiment, filter **220** can be configured so that the bands centered at λ_{A1} and λ_{A2} coincide with radiation bands at which first and second substances of interest

are respectively absorbed. Filter **224** can then be configured so that bands centered at λ_{B1} and λ_{B2} coincide with radiation bands at which the first and second substances are relatively free from absorption.

After the radiation beams are combined at beam combiner **30**, the combined beam is directed along optical path **103** to a partitioning or edge filter **226** configured, for example, to reflect wavelength bands centered at λ_{A1} and λ_{B1} through focusing optics **232** to detector **234** and transmit wavelength bands centered at λ_{A2} and λ_{B2} through focusing optics **233** to detector **235**. Thus, detector **234** is sensitive to the amplitude modulation caused by the differential absorption between the bands centered at λ_{A1} and λ_{B1} (i.e., associated with the first substance) while detector **235** is sensitive to the amplitude modulation caused by the differential absorption between the bands centered at λ_{A2} and λ_{B2} (i.e., associated with the second substance). Note that the FIG. 3 embodiment can be expanded to measure three or more substances simultaneously by using the appropriate bandpass (e.g., triple bandpass filter) and beam partitioning filters.

Further, other filter configurations are possible. For example, the band centered at λ_{A1} could coincide with a radiation band at which the first substance is absorbed; the band centered at λ_{B1} could coincide with a radiation band at which the first substance is not absorbed; the band centered at λ_{A2} could coincide with a radiation band at which the second substance is not absorbed; and the band centered at λ_{B2} could coincide with a radiation band at which the second substance is absorbed.

Still another embodiment of the present invention is illustrated in FIG. 5 and referenced generally by numeral **300**. Once again, like reference numerals will be used for those elements that are the same as those used in the FIG. 1 embodiment. In FIG. 5, bandpass filters **320** and **324** are used in reflection instead of transmission. That is, as illustrated respectively in FIGS. 6A and 6B, filter **320** reflects all wavelengths (to beam combiner **30**) except for the wavelength band centered at λ_A and filter **324** reflects all wavelengths (to beam combiner **30**) except the wavelength band centered at λ_B . As in the FIG. 1 embodiment, absorption at the bands centered at λ_A and λ_B is different for the substance of interest. The beams are combined by beam combiner **30** and transmitted along optical path **103** to a bracketing bandpass filter **326** having a bandpass characteristic that spans the two wavelength bands isolated by filters **320** and **324**. The transmission characteristics of bracketing bandpass filter **326** are illustrated in FIG. 6C. Note that bracketing filter **326** could be replaced with a dual bandpass filter. Either way, focusing optics **32** and detector **34** receive a signal magnitude affected by absorption in the two bands illustrated in FIG. 6D. Because each band is alternately received by detector **34**, an amplitude modulated signal is monitored. The advantages of the FIG. 5 embodiment include fewer components and the preservation of the majority of the radiation for further processing as will now be described with the aid of FIG. 7. The present invention could also be practiced by using dual (or triple) bandpass filters (in place of filters **320** and **324**) and wavelength partitioning optics/detectors to enable the measurement of several substances simultaneously.

The embodiment illustrated in FIG. 7, and referenced generally by numeral **400**, is used to make differential absorption and gas filter correlation measurements simultaneously. As before, like reference numerals are used for elements that are common with the FIG. 5 embodiment. System **400** is useful in measurement applications that require both high measurement specificity for certain gas

species and measurement of a broad class of gases. An example is the remote measurement of car exhaust. In this measurement, high gas specificity is needed to accurately measure NO because of the overlap of a strong water vapor band at 5.2 microns. At the same time, a "total hydrocarbon" measurement is desired in the 3.4 micron carbon-hydrogen absorption region. In other words, the measurement of a specific hydrocarbon is not desired. Rather, the measurement of the net differential absorption in this C-H stretch region is desired as some indication of "total hydrocarbons." Such conflicting types of simultaneous measurements are possible in the present invention. That is, the present invention makes it possible to use the GFCR technique for the NO measurement and the differential absorption technique for the "total hydrocarbon" measurement.

In FIG. 7, a gas correlation cell **440** is disposed in optical path **101** and a vacuum cell **444** is disposed in optical path **102**. Cells **440** and **444** enable a GFCR measurement while filters **320** and **324** enable the differential absorption measurement as described above with reference to FIG. 5. More specifically, the radiation beams are combined at beam combiner **30**. The combined beam is partitioned at edge filter **426** which, for example, transmits the wavelength region associated with the GFCR measurement to a GFCR band-pass filter **446**, focusing optics **432**, and detector **434** so that a standard GFCR measurement can be made as is well known in the art. Edge filter **426** reflects other wavelengths to bracketing or bandpass filter **326** which functions as in the previous embodiment of FIG. 5.

Another way to detect or measure two substances simultaneously using bandpass filters in reflection is shown and referenced generally by numeral **500** in FIG. 8. That is, system **500** is an alternative construction that achieves the results described above with respect to FIG. 3. In optical path **101**, a first bandpass filter **520** reflects all wavelengths except those in a first band centered at λ_{A1} towards one side of a two-sided mirror **526**. Mirror **526** reflects the radiation to a second bandpass filter **521** that reflects all wavelengths except those in a second band centered at λ_{A2} . In a similar fashion, bandpass filters **524/525** and mirror **526** cooperate to remove wavelength bands centered at λ_{B1} and λ_{B2} in optical path **102**. The single beam output from beam combiner **30** can then be processed as described in the FIG. 3 and FIG. 5 embodiments. Detection optics may include bracketing filters **326** as needed.

Still another embodiment of the present invention is shown in FIG. 9 and is referenced generally by numeral **600**. System **600** is similar to system **500** except that mirror **526** is replaced with a two-sided bandpass absorber **626**. Absorber **626** is configured on side **626A** to absorb radiation in a third wavelength band centered on λ_{A3} while reflecting all other wavelengths. This configuration can be accomplished by designing a bandpass filter stack that transmits the band centered at λ_{A3} which is then absorbed internally. For example, the substrate material could strongly absorb this wavelength band. On the other side **626B** of absorber **626** is a second filter stack that selectively transmits/absorbs a wavelength band centered at λ_{B3} . After being combined at beam combiner **30**, a system of partitioning filters/focusing optics/detectors **632**, similar to the systems disclosed in the embodiments of FIGS. 3, 5, 7, and 8, are used to partition the single beam so that the differential absorption between each wavelength band pair (i.e., wavelength band pairs centered at λ_{A1} and λ_{B1} , λ_{A2} and λ_{B2} , and λ_{A3} and λ_{B3}) can be individually and simultaneously sensed.

In still another embodiment of the present invention, system **700** illustrated in FIG. 10 is an alternative construc-

tion for the FIG. 5 embodiment. System **700** is a compact configuration of the present invention in which optical path **103** exits a combination beamsplitter/combiner **750** at an acute angle thereto. A single optical element can be used for beamsplitting and beam combining by, for example, configuring the device's wire grids (not shown) to transmit horizontal polarization in the beamsplitter portion and to transmit vertical polarization in the beam combiner portion.

The advantages of the present invention are numerous. Substance detection and measurement can be achieved without using gas cells. However, the present invention can be configured to provide for simultaneous differential absorption and GFCR measurements. Further, multiple differential absorption measurements associated with multiple substances can be made simultaneously.

Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims. In the claims, means-plus-function and step-plus-function clauses are intended to cover the structures or acts described herein as performing the recited function and not only structural equivalents, but also equivalent structures. Thus, although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures.

What is claimed as new and desired to be secured by Letters Patent of the United States is:

1. A system for detecting a substance, comprising:

means for receiving radiation passing along a sample path of interest;

means for dividing said radiation into a time series of alternating first polarized components and second polarized components orthogonal to said first polarized components;

means for routing said first polarized components along a first optical path and said second polarized components along a second optical path;

gasless means for passing all wavelengths of said first polarized components except at least a first wavelength band wherein first filtered radiation excluding said at least first wavelength band is generated;

means for filtering said second polarized components to isolate at least a second wavelength band wherein second filtered radiation is generated, wherein said first wavelength band and said second wavelength band are unique and wherein spectral absorption of a substance of interest is different at said first wavelength band as compared to said second wavelength band;

means for combining said first filtered radiation and said second filtered radiation to form a combined beam of radiation; and

means for monitoring magnitude of said combined beam alternately at said first wavelength band and said second wavelength band as an indication of the concentration of said substance in said sample path.

2. A system according to claim 1 wherein said gasless means for passing comprises a first gasless optical filter disposed in said first optical path for reflecting all wavelengths of said first polarized components except at least the first wavelength band.

3. A system according to claim 2 wherein said means for filtering comprises a second gasless optical filter disposed in said second optical path for reflecting all wavelengths of said second polarized components except at least the second wavelength band.

4. A system according to claim 3 wherein said first gasless optical filter reflects all wavelengths of said first polarized components except a plurality of unique first wavelength bands such that said first filtered radiation excludes said plurality of first wavelength bands, and wherein said second gasless optical filter reflects all wavelengths of said second polarized components except a plurality of unique second wavelength bands such that said second filtered radiation excludes said plurality of second wavelength bands, said system further comprising:

means, disposed to receive said combined beam, for partitioning said combined beam into a plurality of partitioned beams, each of said plurality of partitioned beams having excluded therefrom one of said plurality of unique first wavelength bands and one of said plurality of second wavelength bands, wherein spectral absorption of a substance of interest is different at said one of said plurality of unique first wavelength bands as compared to said one of said plurality of unique second wavelength bands,

wherein said means for monitoring comprises a plurality of detectors, each of said plurality of detectors being disposed to receive one of said partitioned beams.

5. A system according to claim 1 further comprising a gas filter correlation radiometer coupled to said means for routing, said gas filter correlation radiometer using one of said first polarized components and said first filtered radiation and using one of said second polarized components and said second filtered radiation to measure the concentration of at least one gas species in said sample path.

6. A system according to claim 1 wherein said first polarized components are vertically polarized and said second polarized components are horizontally polarized.

7. A system according to claim 1 wherein said means for monitoring is harmonically synchronized to a frequency at which said time series alternates between said first polarized components and said second polarized components.

8. A system for detecting a substance, comprising:

means for receiving radiation passing along a sample path of interest;

means for dividing said radiation into a time series of alternating first polarized components and second polarized components orthogonal to said first polarized components;

means for routing said first polarized components along a first optical path and said second polarized components along a second optical path;

means for reflecting all wavelengths of said first polarized components except at least a first wavelength band wherein first filtered radiation excluding said at least first wavelength band is generated;

means for passing all wavelengths of said second polarized components except at least a second wavelength band wherein second filtered radiation excluding said second wavelength band is generated, wherein said first wavelength band and said second wavelength band are unique and wherein spectral absorption of a substance of interest is different at said first wavelength band as compared to said second wavelength band;

means for combining said first filtered radiation and said second filtered radiation to form a combined beam of radiation;

means, disposed to receive said combined beam, for filtering the combined beam, said means for filtering having a bandpass characteristic that spans said excluded first and second wavelength bands; and

means for monitoring magnitude of said combined beam received from said means for filtering alternately at said first wavelength band and said second wavelength band as an indication of the concentration of said substance in said sample path.

9. A system according to claim 8 wherein said means for reflecting comprises a first gasless optical filter disposed in said first optical path for reflecting all wavelengths of said first polarized components except at least the first wavelength band.

10. A system according to claim 9 wherein said means for passing comprises a second gasless optical filter disposed in said second optical path for reflecting all wavelengths of said second polarized components except at least the second wavelength band.

11. A system according to claim 10 wherein said first gasless optical filter reflects all wavelengths of said first polarized components except a plurality of unique first wavelength bands such that said first filtered radiation excludes said plurality of first wavelength bands, wherein said second gasless optical filter reflects all wavelengths of said second polarized components except a plurality of unique second wavelength bands such that said second filtered radiation excludes said plurality of second wavelength bands, said system further comprising:

means, disposed to receive said combined beam, for partitioning said combined beam into a plurality of partitioned beams, each of said plurality of partitioned beams having excluded therefrom one of said plurality of unique first wavelength bands and one of said plurality of second wavelength bands, wherein spectral absorption of a substance of interest is different at said one of said plurality of unique first wavelength bands as compared to said one of said plurality of unique second wavelength bands, and

wherein said means for monitoring comprises a plurality of detectors, each of said plurality of detectors being disposed to receive one of said partitioned beams.

12. A system according to claim 8 further comprising a gas filter correlation radiometer coupled to said means for routing, said gas filter correlation radiometer using one of said first polarized components and said first filtered radiation and using one of said second polarized components and said second filtered radiation to measure the concentration of at least one gas species in said sample path.

13. A system according to claim 8 wherein said first polarized components are vertically polarized and said second polarized components are horizontally polarized.

14. A system according to claim 8 wherein said means for monitoring is harmonically synchronized to a frequency at which said time series alternates between said first polarized components and said second polarized components.

15. A system for detecting a substance comprising:

an optical path switch for receiving radiation passing along a sample path of interest, said optical path switch dividing said radiation into a time series of alternating first polarized components and second polarized components orthogonal to said first polarized components, said optical path switch routing said first polarized components along a first optical path and said second polarized components along a second optical path;

a first gasless optical filter train disposed in said first optical path for reflecting all wavelengths of said first

11

polarized components except at least a first wavelength band wherein first filtered radiation excluding said at least first wavelength band is generated;

- a second gasless optical filter train disposed in said second optical path for reflecting all wavelengths of said second polarized components except at least a second wavelength band wherein second filtered radiation excluding said at least second wavelength band is generated, wherein said first wavelength band and said second wavelength band are unique and wherein spectral absorption of a substance of interest is different at said first wavelength band as compared to said second wavelength band;
- a beam combiner disposed to receive said first filtered radiation and said second filtered radiation for combining said first filtered radiation and said second filtered radiation to form a combined beam of radiation;
- a filter disposed to receive said combined beam of radiation and having a bandpass characteristic that spans said excluded first and second wavelength bands; and
- detector means disposed to monitor magnitude of at least a portion of said combined beam received from said filter alternately at said first wavelength band and said second wavelength band as an indication of the concentration of said substance in said sample path.

16. A system according to claim 15 further comprising a gas filter correlation radiometer coupled to said optical path switch, said gas filter correlation radiometer using one of said first polarized components and said first filtered radiation and using one of said second polarized components and said second filtered radiation to measure the concentration of at least one gas species in said sample path.

17. A system according to claim 15 wherein said first gasless optical filter train includes a first optical filtering means for reflecting all wavelengths of said first polarized components except a plurality of unique first wavelength bands such that said first filtered radiation excludes said plurality of first wavelength bands, and wherein said second gasless optical filter includes second optical filtering means for reflecting all wavelengths of said second polarized components except a plurality of unique second wavelength bands such that said second filtered radiation excludes said plurality of second wavelength bands, said system further comprising:

- a beam partitioner disposed to receive said combined beam and for partitioning said combined beam into a plurality of partitioned beams, each of said plurality of partitioned beams having excluded therefrom one of said plurality of unique first wavelength bands and one of said plurality of unique second wavelength bands, wherein spectral absorption of a substance of interest is different at said one of said plurality of unique first wavelength bands as compared to said one of said plurality of unique second wavelength bands, and wherein said detector means comprises a plurality of detectors, each of said plurality of detectors being disposed to receive one of said plurality of partitioned beams.

18. A system according to claim 15 wherein said first polarized components are vertically polarized and said second polarized components are horizontally polarized.

19. A system according to claim 15 wherein said detector means is harmonically synchronized to a frequency at which

12

said time series alternates between said first polarized components and said second polarized components.

20. A substance detection system comprising:

- an optical path switch for receiving radiation passing along a sample path of interest, said optical path switch dividing said radiation into a time series of alternating first polarized components and second polarized components orthogonal to said first polarized components, said optical path switch routing said first polarized components along a first optical path and said second polarized components along a second optical path;

- a first gasless optical filter train disposed in said first optical path for reflecting all wavelengths of said first polarized components except those in a first wavelength band wherein first filtered radiation excluding said first wavelength band is generated;

- at least one gas correlation cell disposed in said first optical path for filtering one of said first polarized components and said first filtered radiation at spectral regions different from that of said first wavelength band;

- a second gasless optical filter train disposed in said second optical path for reflecting all wavelengths of said second polarized components except those in a second wavelength band wherein second filtered radiation excluding said second wavelength band is generated, wherein said first wavelength band and said second wavelength band are unique and wherein spectral absorption of a substance of interest is different at said first wavelength band as compared to said second wavelength band;

- a vacuum cell disposed in said second optical path;

- a beam combiner disposed to receive said first filtered radiation and said second filtered radiation for combining said first filtered radiation and said second filtered radiation to form a combined beam of radiation;

- a filter disposed to receive said combined beam of radiation and having a bandpass characteristic that spans said excluded first and second wavelength bands;

- first detecting means disposed to monitor magnitude of at least a portion of said combined beam received from the filter alternately at said first wavelength band and said second wavelength band as an indication of the concentration of said substance in said sample path; and

- second detecting means disposed to sense a difference in intensity between said first filtered radiation and said second filtered radiation at said spectral regions to measure the concentration of at least one gas species in said sample path.

21. A system according to claim 20 wherein said first polarized components are vertically polarized and said second polarized components are horizontally polarized.

22. A system according to claim 20 wherein said first detecting means is harmonically synchronized to a frequency at which said time series alternates between said first polarized components and said second polarized components.